



OSCAR Chain Belt Series Conveyor

From *Recycling Equipment Manufacturing, Inc.*

OSCAR SERIES OFFSET CONVEYORS FOR: PAPER, MSW, AND SCRAP MATERIALS



REM®'s OSCAR Chain Belt Conveyors are our tough line of heavy-duty feed conveyors. For baler feed applications, MRF feed conveyors, and other heavy applications, REM's® Model Oscar Chain Belt Conveyors are the ideal choice.

REM's® Chain Belt conveyors feature three different configurations. Depending upon your application and budget, we have the OSCAR-LT, OSCAR-HD, and OSCAR-EXT. Built for years of service and low maintenance, these conveyors feature time proven, field tested designs that will last and last.


Each Oscar Chain Belt conveyor is assembled and pre-tested at our facility. Featuring flanged bolt-together sections for easy assembly, and shipped with as much pre-assembled as possible to minimize field installation time.

When you need a tough, rugged, durable conveyor built to last, think of REM's® Model OSCAR Chain Belt Conveyors. To put our model Oscar Conveyors to work for you, call **1-800-745-4736**.



OSCAR Chain Belt Series Conveyors

A Leader in Recycling Equipment Since 1978

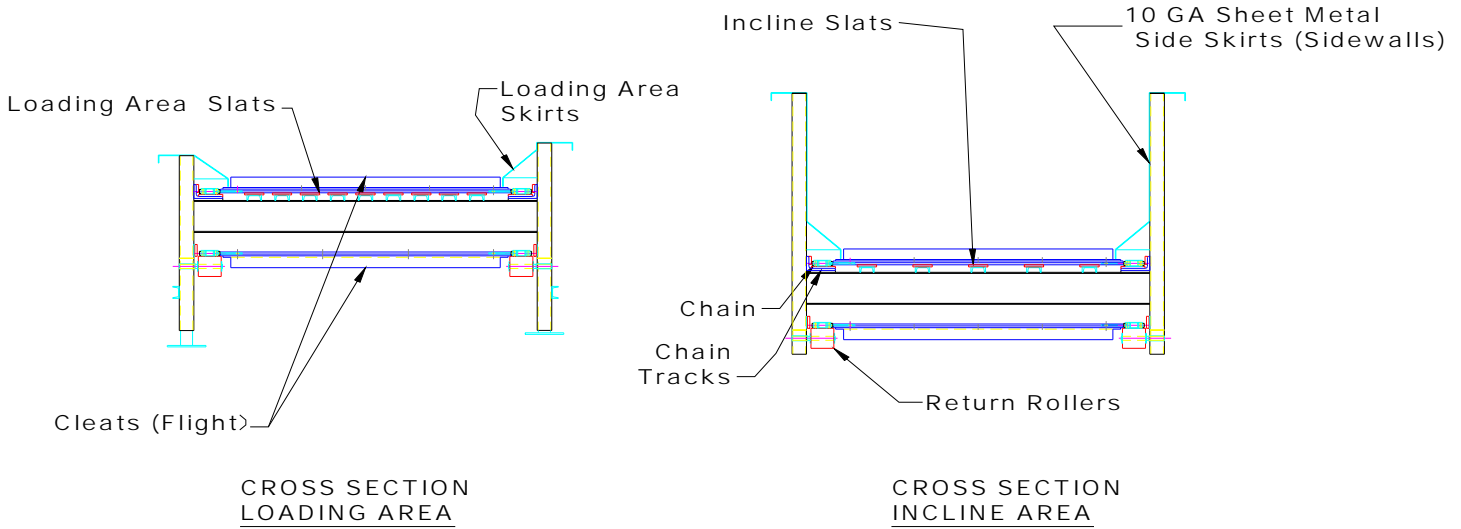

SPECIFICATIONS

	OSCAR-LT	OSCAR-HD	OSCAR-EXT
Chain:	C131 3.075" pitch	WR124 4" pitch	W150HD 6.050" pitch
Belt:	220# 2 ply Rubber 1/8" cover	330# 3 ply Rubber 3/16" cover	330# 3 ply Rubber 3/16" cover
Cleats:	Angle 2x2x 1/4 52" ctr/ctr	Angle 3x3x 3/8 48" ctr/ctr	Angle 3x3x 3/8 48" ctr/ctr

Sprockets: Flame Cut built out of 1045HC Steel

Safety: E-Stop Pull Cables on both sides of the conveyor

Belt Widths: 24" through 96" in 6" increments

Chain Glides: 3/8" to 5/8" UHMW wear liners-
The HD & EXT series pit section is double
slatted 3" channel to first incline section

Belt Speeds: 30 FPM standard up to 80
FPM

Motor: 230/460 volt, 3 phase TEFC

Bearings:
HD & EXT Series Heavy Duty Spherical Roller 4
bolt

CONSTRUCTION

Pit Section Skirt: 3/16" or 1/4" steel plate

Guards: Expanded metal screen for increased
visibility and safety

Supports: Adjustable legs in pit section and adjustable
heavy-duty square tubing in head section

Paint: Standard REM Blue waterborne enamel with OSHA Yellow Guards. Custom colors available at additional cost.

Options: Different types of belt variations (Rubber or PVC), and variable speed drives. Also, infeed hoppers built to match baler, shredder, or sort line. If you don't see it just ask!

Incline Section: LT -12 gauge HD - 10 gauge steel

Frames: H type frames with support ribs and
channels 36" or 48" on centers

Incline: From Zero to Forty-Five Degrees

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Recycling Equipment Manufacturing, Inc.

PO Box 310
Priest River, Idaho 83856 USA
www.remfg.com
E-mail: sales@remfg.com

1-800-745-4736
Office: (208) 448-4736
Fax: (208) 448-1786

© 2005 REM, INC.

Sales and Service