



HDL-2 Hydraulic Tote Lift

From *Recycling Equipment Manufacturing, Inc.*



HYDRAULIC LIFT FOR DUMPING Paper, Glass, Mixed Materials

**REM's® Solution to Your
Container Dumping Problems**

Lift and dump materials from standard 60 to 95 gallon tote containers with this unique and versatile container lift from REM®. This unit is designed for side loading of materials onto REM's® Model SC Sorting Conveyors, or as a feed for a compactor, shredder, crusher, or other processing equipment. Simply load containers onto the lift and use the convenient foot switch to elevate to an approximate 40 degree tipping angle.

REM's® model HDL-2 Hydraulic Tote lift increases worker productivity, reduces back-strain and lowers contaminant levels from its very first day of operation.

DURABLE CONSTRUCTION


Built for your most demanding applications, this rugged unit is capable of lifting containers weighing as much as 750 lbs. Containers up to 29" wide can be loaded onto the lift. Discharge heights of up to 60" tall are standard with the availability of custom designs. REM's® unique C-channel and "tube leg" design is built to reinforce the cylinder support blocks and help center the load. An adjustable slide clamp holds the container in place as it tips. To put REM's® model HDL-2 Hydraulic Lift to work for you call

1-800-745-4736.



HDL-2 Hydraulic Tote Lift

A Leader in Recycling Equipment Since 1978

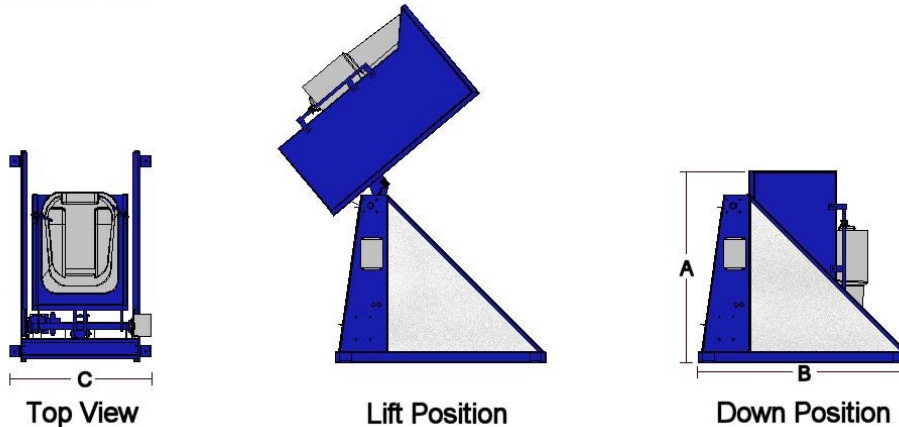

Features:

- Helps avoid back strain and injury
- Lifts up to 750 lbs.
- Handles containers up to 29" wide x 48" tall (std)
- Adjustable retaining slide clamp holds a variety of container sizes
- OSHA-required flow-control valves
- Power-up/gravity-down operation (manual check-valve for return to loading position)
- Convenient push-to-start/release-to-stop foot switch with 10' cord for operator convenience
- Forklift pockets for mobility
(note: Manufacture requires anchoring your Tote to a concrete base for safety)

Specifications:

- All-steel construction
- 2.5 GPM/2 hp power pack
- Single hydraulic cylinder
- Flange mount bearings
- Cycle time under 40 seconds

LIMITED ONE YEAR WARRANTY

- *All dimensions are nominal +/- 1"
- *Specifications subject to change without notice, without incurring responsibility to previous units sold

Dimensions:	HDL
Standard 44" Discharge Unit	
Height	68"
Length (B)	74"
Width (C)	42"
Approx weight LBS.	900
Maximum height raised	10' 6"
Discharge height	52"

Electrical safety features:

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Motor overload/short circuit protection

Options:

- 240 volt single phase
 - 208, 380, 415, 480, or 575 volt, three phase
 - Power cord
 - Other power packs available
 - Custom container widths and discharge heights
- If you don't see it, ask us!

Recycling Equipment Manufacturing, Inc.

PO Box 310
 Priest River, Idaho 83856
 USA

1-800-745-4736
 Office: (208) 448-4736
 E-mail: sales@remfg.com Fax: (208) 448-1786

Sales and Service