



HDL-2 Hydraulic Lift

From *Recycling Equipment Manufacturing, Inc.*

HYDRAULIC LIFT FOR DUMPING Paper, Glass, Mixed Materials



Shown with optional full safety cage

REM's® Solution to Your Container Dumping Problems

Lift and dump materials from carts, bins, Gaylord boxes, etc., with this unique and versatile container lift from REM®. This unit is designed for side loading of materials onto REM's® Model SC Sorting Conveyors, or as a feed for a conveyor, shredder, crusher, or other processing equipment. Simply load containers onto the lift and use the convenient foot switch to elevate to an approximate 35 degree tipping angle (45 degree angle available as an option). REM's® model HDL-2 increases worker productivity, reduces back-strain and lowers contaminant levels from its very first day of operation.

DURABLE CONSTRUCTION

Built for your most demanding applications, this rugged unit is capable of lifting containers weighing as much as 2,000 lbs. REM's® unique HD I-Beam frame design is built to reinforce the cylinder support blocks and provide for increased structural integrity. An adjustable retaining rod holds the container in place as it tips. Containers up to 60" wide can be loaded onto the lift. Discharge heights of up to 60" tall are available.

To put REM's® model HDL-2 Hydraulic Lift to work for you call **1-800-745-4736**.

Ask about our 5,000 LB capacity X-HDL!




HDL-2 Hydraulic Lift


A Leader in Recycling Equipment Since 1978



End View

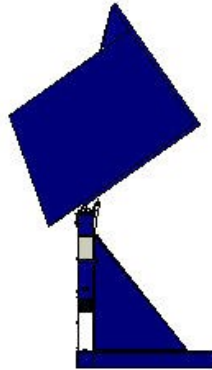

Lift position



Down position

Features:

- Helps avoid back strain and injury
- Lifts up to 2,000 lbs. (5,000 lbs. capacity available)
- Handles containers up to 50" wide x 55" tall (std)
- Adjustable retaining bar: seven (7) positions from 24" to 55" (standard 44" discharge unit)
- OSHA-required flow-control valves
- Power-up/gravity-down operation (manual check-valve for return to loading position)
- Convenient push-to-start/release-to-stop foot switch with 10' cord for operator convenience and safety
- Heavy duty I-Beam frame

Specifications:

- All-steel construction
- 2.5 GPM/2 hp power pack
- Dual hydraulic cylinders
- Flange mount bearings
- Cycle time under 40 seconds
- Hardened steel bushings at pivot points

LIMITED ONE YEAR WARRANTY

- *All dimensions are nominal +/- 1"
- *Specifications subject to change without notice, without incurring responsibility to previous units sold

Dimensions:	HDL
Standard 44" Discharge Unit	
Height	59"
Length	67"
Width	66"
Approx weight LBS.	1200
Maximum height raised	9' 10"
Discharge height	44"

Electrical safety features:

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Motor overload/short circuit protection

Options:

- 220 volt single phase
- 208, 380, 415, 480, or 575 volt, three phase
- Power cord
- 45 degree tipping angle power up, power down
- Other power packs available
- Custom container widths up to 60", discharge heights up to 60"
- If you don't see it, ask us!

Recycling Equipment Manufacturing, Inc.

PO Box 310
 Priest River, Idaho 83856
 USA

1-800-745-4736
 Office: (208) 448-4736
 E-mail: sales@remfg.com Fax: (208) 448-1786

Sales and Service