



## **HDL– Hydraulic Portable Tilter**

From ***Recycling Equipment Manufacturing, Inc.***

**Increase production ~ Avoid back strain  
Portable for all your dumping needs**



REM's "Portable Tilter" was designed as a floor level easily loaded box tilter. This unit is designed for smooth tilting of your container to allow the worker to easily remove products from the bottom of a Gaylord or similar container.

Simply load containers onto the lift and use the convenient push button switch to elevate to an approximate 60 degree angle.

REM's® model HDL-2 Hydraulic box tilter increases worker productivity, reduces back-strain and lowers worker fatigue from the very first day.

### **DURABLE CONSTRUCTION**

Built for your most demanding applications, this rugged unit is capable of lifting containers weighing as much as 750 lbs. Containers up to 50" wide can be loaded into the ground level bucket by pallet jack or forklift.


The hand operated controls are an improvement over foot pedal controls that are often damaged by forklifts. Being able to plug into a standard 120 volt outlet makes this tilter very functional. Portability makes it a valuable addition to the equipment in your plant.

To put REM's® model HDL-Portable Tilter to work for you call **1-800-745-4736**.





# HDL-Tilt Tipper

A Leader in Recycling Equipment Since 1978

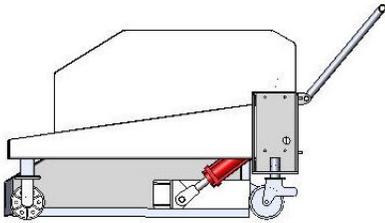

Side View

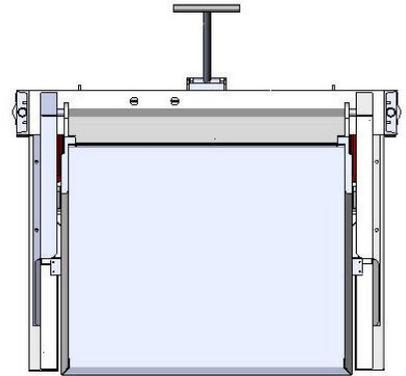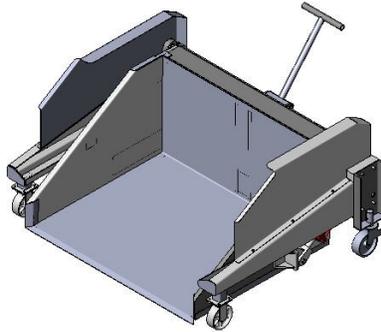

Plan View

### Features:

- Helps avoid back strain and injury
- Lifts up to 750 lbs.
- Handles containers up to 50" wide
- OSHA-required flow-control valves
- Power-up/gravity-down operation
- Convenient push-to-start/release-to-stop button
- Collapsible handle for easy mobility

### Specifications:

- All-steel construction
- 2.5 GPM/1 HP power pack
- Dual hydraulic cylinders

### LIMITED ONE YEAR WARRANTY

\*All dimensions are nominal +/- 1"  
 \*Specifications subject to change without notice,  
 without incurring responsibility to previous units sold

Dimensions:	HDL
Standard width unit	
Height	33.25"
Length	70.25"
Width	56.75"
Approx. weight (LB)	600

### Electrical safety features:

- 120 volt single phase electrical
- Electrical components are UL listed
- Motor overload/short circuit protection

### Options:

- 220 volt single phase
  - 208, 380, 415, 480, or 575 volt, three phase
  - Power cord
  - Other power packs available
  - Custom bucket widths
- If you don't see it, ask us!

## Recycling Equipment Manufacturing, Inc.

PO Box 310  
 Priest River, Idaho USA 83856  
 1-800-745-4736  
 www.remfg.com Office: (208) 448-4736  
 E-mail: sales@remfg.com Fax: (208) 448-1786

Sales and Service