




Heavy Duty Hydraulic Lift (HDL-5)

3000-5000 pound capacity

From ***Recycling Equipment Manufacturing, Inc.***

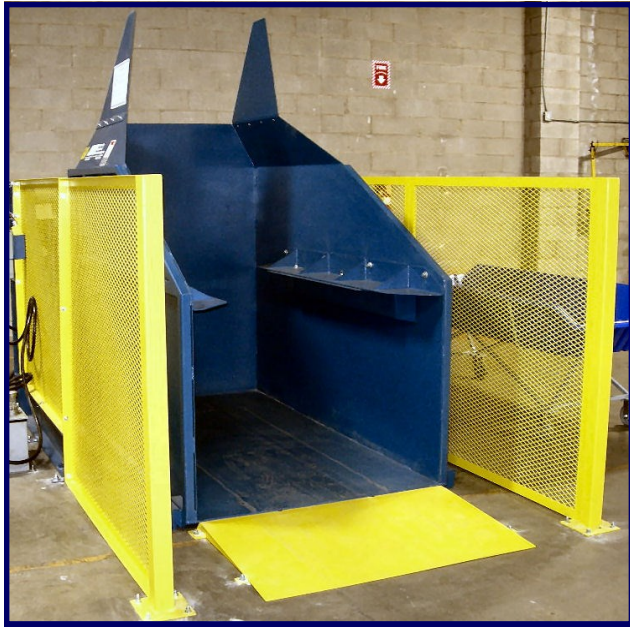

Hydraulic lift's shown are just a sample of the different designs available



REM's® Solution to Your Container Dumping Problems

Dump materials from carts, bins, Gaylord boxes or your custom containers with this versatile, extreme duty container lift from REM®. This unit is designed for side loading of materials onto REM's® Model SC sorting conveyors, or as a feed for a conveyor, shredder, crusher, or other processing equipment. Simply load containers onto the lift and use the convenient foot switch to elevate to a tipping angle of approximately 45 degrees. REM's® model HDL-5 increases worker productivity, reduces back-strain and lowers contaminant levels from its very first day of operation.

HEAVY DUTY DURABLE CONSTRUCTION

Built for your most demanding applications, this rugged unit is capable of lifting containers weighing as much as 5,000 lbs.

REM's® unique heavy duty 10" I-Beam frame construction and oversize rotator shaft along with it's heavy duty bearings are built for maximum structural integrity.

Special retaining rods, clamps or custom designed holding fixtures will keep your containers secure in the bucket while still allowing the material to discharge.


Containers up to 120" wide can be loaded onto this heavy duty lift. Discharge heights of up to 72" tall and custom bucket depth are also available.

To put REM's® model HDL-5 Hydraulic Lift to work for you call **1-800-745-4736**.




HDL-5 Hydraulic Lift


A Leader in Recycling Equipment Since 1978



End View

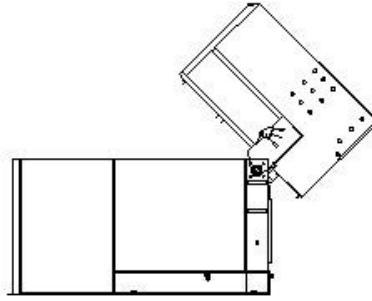

Lift position



Down position

Hydraulic lift shown for illustration purposes only—All HDL-5 machines are designed for specific applications

Features:

- Helps avoid back strain and injury
- Lifts up to 5,000 lbs.
- Custom designed for containers up to 120" wide
- OSHA-required flow-control valves
- Power-up/Power-down operation
- Heavy Duty 10" I-Beam frame
- Shallow incline loading ramp—secured to floor (reduces overall height when tilted)

Specifications:

- Heavy duty structural steel design
- 4.6 GPM/5 hp Hydraulic system
- Dual hydraulic cylinders w/rod end spherical eye
- Heavy duty flange mount bearings
- Soft cushion rubber bucket stops

LIMITED ONE YEAR WARRANTY

*All dimensions are nominal +/- 1"

*Specifications subject to change without notice, without incurring responsibility to previous units sold

Electrical safety features:

- Unique delay for up & down operations
- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Motor overload/short circuit protection

Options:

- 220 volt single phase
- 208, 380, 415, 480, or 575 volt, three phase
- Flashing safety lights
- Cycle timers
- Full safety enclosures
- 7.5 & 10 HP Hydraulic systems available
- Custom container widths up to 120", discharge heights up to 72"
- Spring loaded hold-down bars
- Custom hold-down
- If you don't see it, ask us!

Recycling Equipment Manufacturing, Inc.

PO Box 310
Priest River, Idaho
USA 83856

www.remfg.com
E-mail: sales@remfg.com

1-800-745-4736
Office: (208) 448-4736
Fax: (208) 448-1786

© 2000 REM, INC.

Sales and Service